


AcPC4610E CompactPCI Non-intelligent PMC Carrier Card (air-cooled)

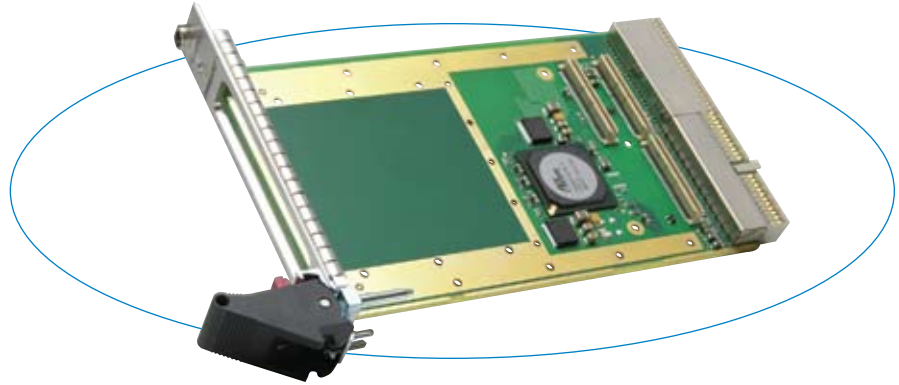

Description

This board provides an easy and low cost solution that enables use of a PMC mezzanine I/O module in a standard 3U CompactPCI computer system. The carrier card acts simply as an adapter to route PCI bus signals to and from the PMC module through the CompactPCI card slot edge connector. All Acromag PMC modules and those from other vendors are supported.

This board uses a PLX Technology PCI6540 transparent PCI/PCI bridge for data transactions from the PCI bus (system host) to the PMC site. The bridge device provides a 32-bit 33/66 MHz PCI interface.

Front and rear-panel access to field I/O signals are accommodated. The carrier card's front panel cut-out provides access to a PMC module's front I/O connector. Alternatively, all I/O signals can be routed through the carrier card's rear J2 connector.

An air-cooled rear transition board, Acromag Model TRANS-C4610, maps the field I/O on the PMC module to the rear of the CompactPCI system.

Features

- 3U CompactPCI card
- Holds one PMC card
- 32-bit 33/66 MHz PCI Interface
- Transparent PCI/PCI bridge for data transactions from the PCI bus to PMC module
- Rear connection I/O access
- Supports both 5V and 3.3V signalling
- -40 to 85°C

This carrier card interfaces a PMC module to a CompactPCI computer system.

Specifications

Environmental

- Operating temperature: -40 to 85°C.
- Storage temperature: -55 to 100°C.
- Relative humidity: 5-95% non-condensing
- Power (received from the CompactPCI 3U Back Plane):
 - 3.3V DC (±5%)*: 135mA typical, 150mA max.
 - 5.0V DC (±5%)*: 50mA typical, 70mA max.
 - ±12V DC (±5%)**: Per PMC module.
 - * With no PMC module installed, ±12V DC not used.
 - ** Max. power 7.5W (total all supplies) per PMC standard.

MTBF: Call factory

Physical: CompactPCI Carrier Card

- Physical configuration: 3U CompactPCI Card
- 100 x 160mm.
- Rear CompactPCI connectors: 2mm J1 & J2 connectors.
- PMC connectors: Three 1mm connectors.
- The air-cooled model (AcPC4610E) uses the standard front panel assembly with a PMC bezel cutout.

Physical: Transition Module

- Physical configuration: Half-length 3U CompactPCI Card
- 100 x 80mm.
- Connectors: 2mm RJ2 connector which maps the rear I/O signals to a SCSI-3 connector. This model also uses a standard rear front panel assembly with a SCSI-3 connector cutout.

PMC and CompactPCI bus Compliance

- Meets PCI specification version 2.3, CompactPCI specification PICMG 2.3 R1.0, and PMC specification P1386.1.
- Data transfer bus: Slave with 32-bit, 16-bit, and 8-bit data transfer operation.
- Interrupts: CompactPCI bus INTA# interrupt signal.
- PCI Interface: PLX Technology PCI6540 transparent PCI/PCI bridge for data transactions from the PCI bus (system host) to the PMC site. The bridge device provides a 32-bit 33/66 MHz PCI interface.


Ordering Information

Carrier Cards

- AcPC4610E**
CompactPCI bus carrier card for one [PMC module](#), air-cooled

Accessories (see [accessories documentation](#) for details)

- TRANS-C4610:** Transition module, air-cooled
- 5028-432:** Shielded cable, SCSI-3 68-pin connector, 2m long.
- 5025-288:** Termination panel, DIN rail-mount, 68 screw terminals, SCSI-3 connector.

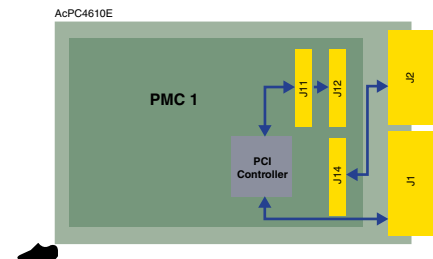

All trademarks are the property of their respective owners.