

Getac

Windows®. Life without Walls™.
Getac recommends Windows 7.

Getac M230
Fully Rugged Notebook

Unique Graphic Features Intact in a Powerful Ultra-slim Unit

Powering Your Daily Mission



M230

Fully Rugged
Notebook

 **RedLinX**[™]
Embedded Solutions

www.redlinx.co.za

Rugged Mobile Computing Solutions



Discrete Graphics Engine



High Resolution LCD



Fanless



Back Light Keyboard

- Media Bay Feature Maximizes Flexibility and Customized Applications
- Screen Size: 14.1" XGA or 15" SXGA+
- MIL-STD 810G certified and IP65 compliance
- Optional MIL-STD 461F certified
- Optional UL1604 Class 1, Division 2, Group A, B, C, D
- Full Magnesium Alloy Case
- Sealed Ports and Connectors
- Shocked-protected Removable HDD
- Vibration & Drop Resistant
- QuadraClear™ Sunlight Readable LCD Screen
- Versatile Wireless Access: WLAN, WWAN, and Bluetooth
- Fan-less Design
- Optional Salt Fog Compliance
- Optional nVIDIA® GeForce™ G105M 512MB discrete graphic controller



The Getac M230 is the latest ultra slim model of the Getac Rugged Notebook family. Powered by Intel® Centrino® Mobile Technology and Core™2 Duo Processor you can have the best wireless access and performance in various applications.

Equipped with optional nVIDIA graphic controller and high resolution LCD screen, the M230 is perfectly made for intensive mapping & graphic applications. Also, the cutting-edge QuadraClear™ sunlight readable LCD screen makes M230 perfectly adaptable to outdoors without interference by direct sunlight.

A built-in WLAN or an optional WWAN communication solution allows users to maintain network access without delay.

In demanding environments where security always matters, the M230 has a built-in TPM chip and a smart card reader to protect your valuable data.

The magnesium alloy case, shock-protected HDD, and waterproof keyboard and touchpad make the M230 MIL-STD 810G certified and IP65 compliant to withstand any mishap.

I/O Ports



Back Side

- DC in Jack x 1
- LAN (RJ45)
- External VGA x 1
- Audio output x 1
- Serial port x 2
- (Modem) RJ11 or optional 2nd LAN (RJ45) X 1
- Microphone x 1



Left Side

- Media bay x 1
- Shock-protected HDD x 1



Right Side

- Primary Li-Ion smart battery
- PCMCIA Slots (Type II x 2 or Type III x 1)
- USB 2.0 x 2
- IEEE 1394b x 1

Industry Applications



Public Safety

Featuring MIL-STD-810G and IP65, the M230 is designed specifically for police officers and patrol purposes as an effective tool to access police database to fight against crime, allowing remote access to database, report key-in and manage tasks effectively.



Professional Service

Equipped with optional nVIDIA® GeForce™ G105M 512MB VGA and optional 500 nits QuadraClear™ display, making M230 best suit for outdoor applications without being affected by direct exposure under the sunlight, allowing outdoor users to proceed geographical investigation and science research.



Field Service

M230's salt fog design allows outdoor users to conduct investigation under harsh environment, to collect and analyze data directly in the field, which can be used as a controller to connect sonar to detect the location of fish crowd.

Optional Accessories



Vehicle dock

W x D x H: 351 x 316 x 145 mm
(13.8" x 12.4" x 5.7")

- USB 2.0 x 2
- Audio output x 1
- Video capture x 1
- External VGA x 1
- Serial port x 2
- Parallel port x 1
- Microphone x 1
- Ignition x 1
- Speaker x 2



Vehicle mount

W x D x H: 302 x 316 x 188 mm
(11.8" x 12.4" x 4.6")



Vehicle adapter
(90Watts, 11-16V
and 22-32V)



Battery charger



Primary battery
pack



Media Bay
2nd battery pack



Carrying bag



Stylus




AC Adapter
(90Watts,
100-240V input)

Specifications

Operating System	Genuine Windows® XP Professional Genuine Windows Vista® Business Genuine Windows® 7 Professional	Communication Interface	10/100/1000 base-T Ethernet 56K ITU V.92 modem Intel WiFi Link 5100 802.11 a/b/g/n Optional Bluetooth (v2.0+EDR class 2) Optional GPS Optional EV-DO / GSM / GPRS / EDGE / UMTS / HSDPA
Mobile Computing Platform	Intel® Centrino® Technology - Intel® Core™2 Duo Processor L7400 1.5GHz - 667MHz FSB - 4MB L2 cache - Mobile Intel® 945GM chipset	Software	Adobe® Reader® Computrace® Compatible BIOS Nero 8
VGA Controller	Intel® Graphics Media Accelerator 950, Max. 128MB shared memory Optional nVIDIA® GeForce™ G105M 512MB discrete graphic controller	Security Feature	TPM 1.2 Optional smart card reader (occupies one PCMCIA type II slot) Kensington lock
Display	14.1" TFT LCD XGA (1024 x 768) or 15" TFT LCD SXGA+ (1440 x 1050) Optional touchscreen Optional QuadraClear™ sunlight readable display	Power	AC adapter (90W, 100-240V, 50 / 60Hz) Li-Ion smart battery (7800mAh) (up to 4 hours of battery life) Optional Media Bay 2nd Li-Ion smart battery (3700mAh)
Storage & Memory	1GB DDR2 expandable to 4GB SATA HDD 250GB / 320GB	Dimension (W x D x H) & Weight	14.1": 328 x 272 x 46 mm (12.9" x 10.7" x 1.8"), 4.15 kg (9.16 lbs) 15": 338 x 286 x 46 mm (13.3" x 11.3" x 1.8"), 4.4 kg (9.9 lbs)
Keyboard	Membrane keyboard Optional LED backlit rubber keyboard	Rugged Feature	Fully rugged MIL-STD-810G certified and IP65 compliance Optional MIL-STD-461F certified Optional UL1604 Class 1, Division 2, Group A, B, C, D Full magnesium alloy case Shock-protected removable HDD Vibration & drop resistant Optional salt fog compliance
Pointing Device	Touchscreen - Optional pressure sensitive touchscreen Touchpad - Glide touchpad with scroll bar - Optional resistive (Glove) touchpad	Environmental Specification	Temperature: - Operating: 0°C to 55°C / 32°F to 131°F Optional low temperature: -20°C / -4°F - Storage: -40°C to 70°C / -40°F to 158°F Humidity: - 5% to 95% RH, non-condensing
Expansion Slot	PCMCIA Type II x 2 or Type III x 1		
Multimedia Bay	DVD super multi drive Optional 2nd battery		
X Bay	Reserved for Customization		
I/O Interface	Serial port (9-pin; D-sub) x 2 External VGA (15-pin; D-sub) x 1 Audio output (Mini-jack) x 1 Microphone (Mini-jack) x 1 DC in Jack x 1 USB 2.0 (4-pin) x 2 Modem (RJ11) x 1 or optional 2nd LAN (RJ45) LAN (RJ45) x 1 IEEE 1394b x 1 Docking connector x 1 RF antenna pass-through for GPS and WWAN		

** Battery life testing conducted under BatteryMark 4.0.1. Battery performance will vary upon software applications, wireless settings, power management settings, LCD brightness, customized modules and environmental conditions. The battery has a limited number of charge cycles and may eventually need to be replaced by a Getac service provider. Battery life and charge cycles vary by use and settings.

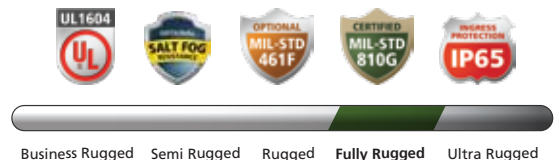

Getac EUROPE

Germany Office -
Getac Technology GmbH
Kanzlerstrasse 4
40472 Duesseldorf, Germany

Italy Office

Tel: +39 02 36539562

UK Office - Getac (UK) Ltd.

Mitac house, Nedge Hill, Telford,
Shropshire, TF3 3AH, U.K
Tel: +44 1952 207 200

Getac NORTH AMERICA

USA Office - Getac Inc.

43 Tesla, Irvine, CA 92618, USA
Toll Free: +1 886 GO GETAC
(1 886 464 3822)

Getac ASIA

China Office - Getac Mobile Ltd.

- Kunshan Office:
Export Processing Zone, 269,
No.2 Dadao, Changjiang South Rd.,
Kunshan City, Jiangsu, China
Tel: +86 512 57382090

- Shanghai Office:

Room 122, Floor 2,
No.211 Jiangchang 3rd Rd.,
Zhabei District, Shanghai, China
Tel: +86 21 61401023

- Beijing Office:

Room 501, Haowei Building,
No.25 Beitai Pingzhuang Rd.,
Haidian District, Beijing, China
Tel: +86 10 62381104

Japan Office - MiTAC Japan Corporation

Yasuda 8th Building 6F,
Kaigan 3-chome 3-8, Minato-ku,
Tokyo, 108-0022, Japan
Tel: +81 3 3769 8311 # 6411

Taiwan Office - Getac Technology Corporation

5F, Building A, No. 209,
Section 1, Nangang Rd.,
Nangang Dist., Taipei City,
11568, Taiwan, R.O.C.
Tel: +886 2 2785 7888

SALES CONTACT

North America
ruggedsales@getac.com

South America
sales-getac-SAmerica@getac.com

EMEA
sales-getac-EMEA@getac.com

- Germany:
sales-getac-DACH@getac.com

- Italy:
sales-getac-Italy@getac.com

- UK:
sales-getac-UK@getac.com

Asia Pacific
sales-getac-APAC@getac.com

- China:
sales-getac-China@getac.com

- Japan:
sales-getac-Japan@getac.com

MARKETING CONTACT

Global
Globalmarketing@getac.com

North America
NorthAmericamarketing@getac.com

South America
SouthAmericamarketing@getac.com

EMEA
EMEMarketing@getac.com

Asia Pacific
APACmarketing@getac.com

www.getac.com

Copyright © 2010 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
V02M03Y10

