


# MPM-842P

400W PS/2 ATX power supply with active PFC

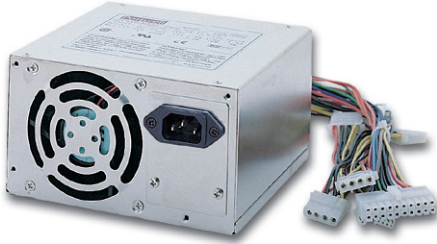

## SPECIFICATION

Input Voltage	90V ~ 264V AC, full range
Input Frequency	47 ~ 63 Hz
Input Current	7.5A@115V, 3.5A@230V
Efficiency	> 71%
Holdup Time	16 ms at full load
Over Voltage Protection	+5V: 4.75 ~ 5.25V; +3.3V: 3.14 ~ 3.47V; +12V: 11.4V ~ 12.6V
Over Power/Load Protection	Output power over 110% ~ 150%
MTBF	>160,000 hrs
EMI & Safety Approval	TUV, UL/cUL
Temperature/Humidity	Operating: 0 ~ 40°C, 20 ~ 90%RH Storage: -20 ~ 60°C, 5 ~ 95%RH
Dimension (WxDxH)	150 x 140 x 86 mm; 5.9" x 5.5" x 3.4"

## FEATURES

- PS/2 ATX power supply suitable for 2U and larger chassis
- Active PFC, full-range input
- Support Intel® Pentium® 4 processor
- Max. 12V output is 22A
- Medical level power supply

## ORDERING GUIDE

- **MPM-842P**  
350W PS/2 ATX power supply with active PFC

## DC OUTPUT

	+5V	+3.3V	+12V	-12V	+5Vsb
<b>Max. Load</b>	21A	22A	22A	0.8A	1.5A
<b>Min. Load</b>	0.3A	0.5A	1A	0A	0.1A
<b>Load Reg.</b>	±5%	±5%	±5%	±5%	±5%
<b>Line Reg.</b>	±1%	±1%	±1%	±1%	±1%
<b>Ripple &amp; Noise</b>	50mv	50mv	120mv	120mv	50mv

# MPI-815H

150W 1U ATX power supply with active PFC



## SPECIFICATION

Input Voltage	90V ~ 264V AC, full range
Input Frequency	47 ~ 63 Hz
Input Current	6A@115V, 3A@230V
Efficiency	> 75%
Holdup Time	16 ms at full load
Over Voltage Protection	+5V: 5.7 ~ 6.5V; +3.3V: 3.9 ~ 4.3V; +12V: 13.6 ~ 15
Over Power/Load Protection	Output power over 110% ~ 150%
MTBF	>130,000 hrs
EMI & Safety Approval	UL
Temperature/Humidity	Operating: 0 ~ 40°C, 20 ~ 90%RH Storage: -20 ~ 60°C, 5 ~ 95%RH
Dimension (WxDxH)	198 x 93 x 40.5 mm; 7.8" x 3.66" x 1.6"

## FEATURES

- 1U ATX power supply
- Full-range input
- Max. +5V standby output is 14A
- Thermal protection
- +5V standby & remote On/Off

## ORDERING GUIDE

- **MPI-815H**  
150W fanless, 1U, ATX power supply



## DC OUTPUT

	+5V	+3.3V	+12V	-12V	+5Vsb
<b>Max. Load</b>	14A	12A	10A	1A	1.5A
<b>Min. Load</b>	1A	0A	0A	0A	0A
<b>Load Reg.</b>	±2%	±5%	±5%	±5%	±5%
<b>Line Reg.</b>	±1%	±1%	±1%	±1%	±1%
<b>Ripple &amp; Noise</b>	50mv	50mv	100mv	150mv	100mv