



## AudioCodes CPE & Access Gateway Products

### ABOUT AUDIOCODES

AudioCodes Ltd. (NASDAQ: AUDC) provides innovative, reliable and cost-effective Voice over IP (VoIP) technology, Voice Network Products, and Value Added Applications to Service Providers, Enterprises, OEMs, Network Equipment Providers and System Integrators worldwide. AudioCodes provides a diverse range of flexible, comprehensive media gateway, and media processing enabling technologies based on VolPerfect™ – AudioCodes' underlying, best-of-breed, core media architecture. The company is a market leader in VoIP equipment, focused on VoIP Media Gateway, Media Server, Session Border Controllers (SBC), Security Gateways and Value Added Application network products. AudioCodes has deployed tens of millions of media gateway and media server channels globally over the past ten years and is a key player in the emerging best-of-breed, IMS based, VoIP market. The Company is a VoIP technology leader focused on quality and interoperability, with a proven track record in product and network interoperability with industry leaders in the Service Provider and Enterprise space. AudioCodes Voice Network Products feature media gateway and media server platforms for packet-based applications in the converged, wireline, wireless, broadband access, cable, enhanced voice services, video, and Enterprise IP Telephony markets. AudioCodes' headquarters are located in Israel with R&D in the U.S. Other AudioCodes' offices are located in Europe, India, the Far East, and Latin America.

### International Headquarters

1 Hayarden Street,  
Airport City  
Lod 70151, Israel  
Tel: +972-3-976-4000  
Fax: +972-3-976-4040

### AudioCodes Inc.

27 World's Fair Drive,  
Somerset, NJ 08873  
Tel: +1-732-469-0880  
Fax: +1-732-496-2298

Contact us: [www.audiocodes.com/info](http://www.audiocodes.com/info)

Website: [www.audiocodes.com](http://www.audiocodes.com)

©2008 AudioCodes Ltd. All rights reserved. AudioCodes, AC, Ardito, AudioCoded, NetCoder, TrunkPack, VoicePacketizer, MediaPack, Stretto, Mediant, VolPerfect and IPmedia, OSN, Open Solutions Network, What's Inside Matters, Your Gateway To VoIP, 3GX, InTouch, CTI2, CTI Squared, Nuera and Netrake are trademarks or registered trademarks of AudioCodes Limited. All other products or trademarks are property of their respective owners.

Ref. # LTRM-30020 05/08 V.1



## Mediant™ 1000 MSBG Multi-Service Business Gateway



### BENEFITS FOR SERVICE PROVIDERS

- A highly integrated device for VoIP, Data, Security & Access forming a single managed point of demarcation
- SIP Mediation enabling SIP Trunking in a variety of IP-PBX environments
- Simplified management & maintenance using a unified management tool
- Service survivability and high availability

### BENEFITS FOR BUSINESSES CUSTOMERS

- “All-in-one” box reducing CapEx and simplifying maintenance and management
- Enhanced Voice and Data Security leveraging on an embedded Enterprise-Class Session Border Controller and Firewall
- SIP mediation for flexible SIP Trunking service
- Multiple service provider connectivity to optimize service charges
- Ready for hosting IP-PBX and office Value Added Services for increased productivity

### BENEFITS FOR OEM AND VALUE ADDED SERVICES DEVELOPERS

- An integrated and compact platform ready for hosting a variety of business applications
- Solving interoperability and integration “pains” with Media Gateways, Media Servers, SBCs, Routers, etc.
- Built-in SIP-controlled media processing resource for advanced voice applications (Conferencing, Streaming, etc.)
- Embedded SIP mediation and transcoding enabling SIP trunking services
- Enhanced Voice and Data Security

### PRODUCT HIGHLIGHTS

- A direct evolution of the field-proven and highly interoperable Mediant 1000 VoIP media gateway
- Enterprise-Class Session Border Controller
- IP-to-IP Protocol normalization and Media transcoding
- Full Data security suite including Firewall, IDS/IPS, VPN & SSL
- Integrated Router
- Advanced Media Processing Module and generic application processor



The **Mediant™ 1000 MSBG** is an all-in-one multi-service access solution for Service Providers offering managed services and distributed Enterprises. This multi-service business gateway is designed to provide converged Voice & Data services for business customers at wire speed, while maintaining SLA parameters and superior voice quality.

The Mediant 1000 MSBG is based on AudioCodes' VolPerfect best-of-breed Media Gateway technology, combined with Enterprise class Session Border Controller, Data & Voice security elements, Data Routing, LAN Switching and WAN Access.

### BEST-OF-BREED ENTERPRISE CLASS MEDIA GATEWAY

The Mediant 1000 MSBG is based on a highly interoperable Media Gateway which supports a mix of 1-4 E1/T1/J1 Spans, 4-20 BRI lines and 4-24 Analog FXS/FXO interfaces. Enhanced dialing plans and voice routing capabilities along with SIP to SIP mediation, allow enterprise customers to enjoy the benefits of SIP Trunking services and IP based Unified Communications, as well as flexible PSTN and legacy PBX connectivity.

### DATA ROUTING AND WAN ACCESS

The Mediant 1000 MSBG offers Data Routing capabilities by providing static routing and dynamic routing protocols such as RIP/OSPF and BGP. In addition, the MSBG supports a selection of Ethernet/ADSL2+/VDSL and GPON WAN interfaces providing flexibility in connecting to Service Providers.

### SBC (SESSION BORDER CONTROLLER) AND SECURITY SERVICES

AudioCodes Mediant 1000 MSBG is designed as a secured VoIP and Data platform. Enhanced Media Gateway security features include SRTP for media, TLS for SIP control, IPsec for management, and other additional features. Data Security functions include integrated Stateful Firewall, IDS/IPS, SSL for remote user access and site to site VPN. A fully functioning Enterprise class Session Border Controller provides a secured voice network deployment based on a Back-to-Back User Agent (B2BUA) Implementation.

### SURVIVABILITY SERVICES

Customers serviced by a centralized IP-Centrex server or branch offices of distributed enterprises may face a service continuity challenge. The SAS (Stand Alone Survivability) functionality enables internal office communication between SIP clients, along with PSTN fallback, in the case of connection failure with the centralized SIP IP-Centrex server or IP-PBX.

### VALUE-ADDED SERVICES BY A 3RD PARTY APPLICATION PLATFORM

AudioCodes Mediant 1000 MSBG extends the flexibility of the Multi-Service Business Gateway with a built-in Open Solution Network (OSN) Server module, an Intel processor based server, hosting a variety of 3rd party applications (IP-PBX, Call Center, Conferencing and more).

In addition, an advanced DSP based Media Processing Module (MPM) enables the implementation of media processing services such as announcements, recording, IVR, conferencing & transcoding.


### TARGET APPLICATIONS

- Voice over Broadband (VOBB) and Cable Operators
- SIP Trunking
- IP Centrex
- Distributed Enterprises

# Mediant™ 1000 MSBG Multi-Service Business Gateway

## MEDIANT 1000 MSBG IN SERVICE PROVIDER NETWORKS


As Enterprises struggle to control their communication operating and equipment costs, outsourcing their Voice and Data infrastructure to a Service Provider is becoming a more attractive option. The Mediant 1000 MSBG offers service providers who are delivering hosted and managed communication services, a clear and easy-to-manage demarcation point, combining Data Routing and Security, WAN Access, Secured VoIP and a Stand Alone Survivability feature.

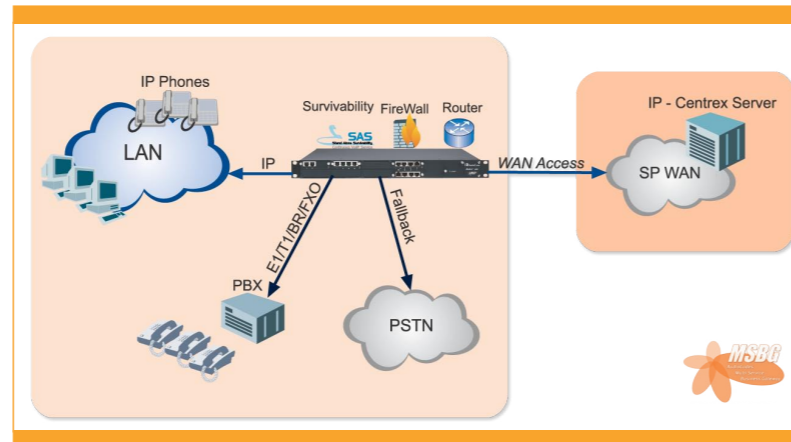

## MEDIANT 1000 MSBG IN DISTRIBUTED ENTERPRISE NETWORKS

Enterprises are striving to be more productive, efficient, and responsive to their internal customers. The convergence of secured voice services, Stand Alone Survivability, Data Routing and Security and WAN Access into a branch office unified platform, enables a high level of protection, cost-optimization and support for the growing communication needs of the Enterprise.

Additionally, the Mediant 1000 MSBG is utilized at company headquarters, providing a suite of services which include secured SIP Trunking by an Enterprise-class Session Border Controller, survivable VoIP media gateway and a cost-effective IP-PBX platform.

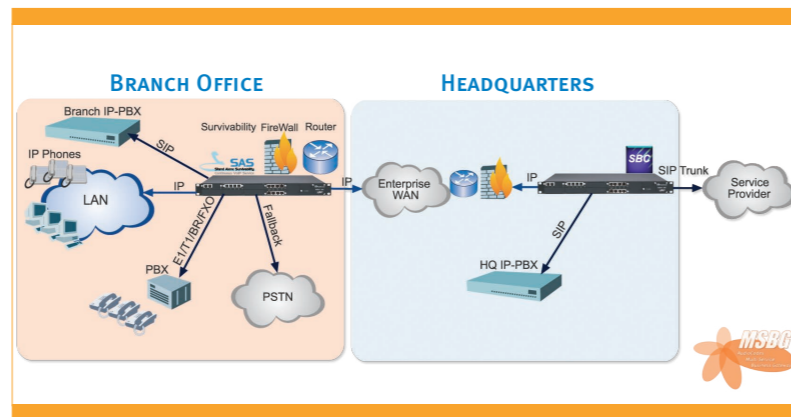

## SPECIFICATIONS

Interfaces	
PSTN Modularity and Capacity	Voice interface: the M1K is equipped with 6 Slots for hosting voice processing and PSTN termination modules (up to 120 TDM-VoIP channels per Gateway)
Digital Module	1, 2 or 4 E1/T1/J1 spans per module using RJ-48c connectors with an option of PSTN Fallback
Analog Module	4 ports FXO or FXS per module using RJ-11 connectors, ground start and loop start
BRI Module	4 BRI ports (8 calls) per module, network ST interfaces. NT or TE termination, support Euro ISDN, VN4/6 or QSIG
Media Processing Module	Support Media processing options of up to 60 Conferencing legs (3 way or N-way), play, record to IP or PSTN
Networking Interfaces	
WAN	WAN interface 10/100/1000 Ethernet BaseT or Optical, ADSL 2+*, VDSL*, xPON*
LAN	3 LAN ports 10/100/1000 BaseT
OSN Server Platform	
Single Chassis Integration	Embedded, Partner Application Platform for third party services
CPU	Pentium 1.1 GHz
Memory	One SODIMM 1G RAM
Storage	Single/Dual hard disk drives
Interfaces	10/100 Base-TX, USB, RS-232

\*Future Release

Media Processing	
Voice Coders	G.711, G.726, G.723.1, G.729A, GSM-FR, iLBC, EG.711 Independent dynamic vocoder selection per channel
Echo Cancellation	G.165 and G.168-2002, with 32, 64 or 128 tail length
Quality Enhancement	Dynamic programmable jitter buffer, VAD, CNG, 802.1P/Q VLAN tagging, DiffServ voice quality monitoring, G.729B
DTMF/MF Transport	Packetside or PSTN side detection and generation, RFC 2833 compliant DTMF relay Call Progress tones Detection and Generation
IP Transport	VoIP (RTP/RTCP) per IETF RFC 3550 and 3551
Fax and Modem Transport	T.38 compliant (real time fax), Automatic bypass to PCM or ADPCM, V.34
Signaling	
Digital - PSTN Protocols	<b>CAS:</b> MF-R1: T1 CAS (E&M, loop start, Feature Group-D, E911CAMA), E1 CAS (R2 MFC), R1.5 numerous protocol and country variants <b>ISDN PRI:</b> ETSI/EURO ISDN, ANSI NI2 and other variants (DMS100, 5ESS) QSIG.IUA (SIGTRAN), VN3, VN4, VN6
Analog Signaling	FXS; Caller ID; polarity reversal; metering tones, distinctive ringing, visual message waiting indication, loop start, ground start
Routing	
	DHCP/PPPoE/L2TP/PPTP client towards WAN DHCP server towards LAN VLAN Layer 3 routing Internal layer 2 switching Static and dynamic routing (RIP1, RIP2, OSPF*, BGP*) IPv6*
Control & Management	
Control Protocols	SIP, MSCML (UDP, TCP, TLS) Stand Alone Survivability for service continuity
Operations & Management	AudioCodes Element Management System Embedded HTTP Web Server, Telnet, SNMP V2/V3 Remote configuration and software download via TFTP, HTTP, HTTPS, DHCP and BootP, RADIUS, Syslog (for events, alarms and CDRs)
IP/VoIP Quality of Service	
	IEEE 802.1P, TOS, DiffServ labeling IEEE 802.1Q. VLAN tagging Shaping, Policing, Queuing, Bandwidth Reservation RTCP-XR Report Publish (RFC 3611)
Security	
Session Border Controller	<ul style="list-style-type: none"> <li>SIP Header conversion: •IP to IP Routing translations of SIP, UDP, TCP, TLS</li> <li>•Translation of RTP, SRTP</li> <li>•Support SIP trunk with multi-ITSP (Registrations to ITSPs is invoked independently)</li> <li>•Topology hiding</li> <li>•Call Admission Control</li> <li>•Call Black/White list</li> <li>•Intrusion detection/prevention (NIDS)</li> <li>•Anti SPIT &amp; SPAM mechanisms</li> </ul>
Data Security	<ul style="list-style-type: none"> <li>IPsec, up to 8 links: <ul style="list-style-type: none"> <li>•ESF - Tunnel mode</li> <li>•Encryption</li> <li>•Authentication</li> <li>•IKE mode - IPsec VPN</li> </ul> </li> <li>DoS Protection of: <ul style="list-style-type: none"> <li>•Fragmented traffic</li> <li>•Malformed Request</li> <li>•Ping of Death</li> <li>•DoS attack</li> <li>•Properly formed request from unauthenticated source</li> <li>•DDoS attack</li> <li>•SYN flood</li> </ul> </li> <li>Stateful packet inspection firewall</li> <li>Bad fragment, spoofed connection</li> <li>DMZ Host</li> <li>Port Triggering</li> <li>Packet Filtering</li> <li>Application Layer Gateway</li> <li>S RTP</li> </ul>
Hardware Specifications	
Power Supply	Single or dual redundant universal 90-260 V AC, redundant power supply
Physical	1U high, 19-inch wide
Regulatory Compliance	
Safety and EMC Standards	Telecommunication Standards TIA/EIA-IS-968, TBR-4, TBR-13, and TBR-21 UL60950-1; FCC 47 CFR part 15 Class B,
Environmental Specifications	CE Mark (EN55022 Class B, EN60950-1, EN55024, EN300 386, EN61000-3-2/3-3) ETS 300019-2-1 Storage T1.2, ETS 300019-2-2 Transportation T2.3, ETS 300019-2-3 Operating T3.2

\*Future Release