


ROBO-8777VG2A

Intel® Core™ 2 Duo processor based PICMG SBC with DDR2 SDRAM, VGA, Dual Gigabit Ethernet, Audio and USB

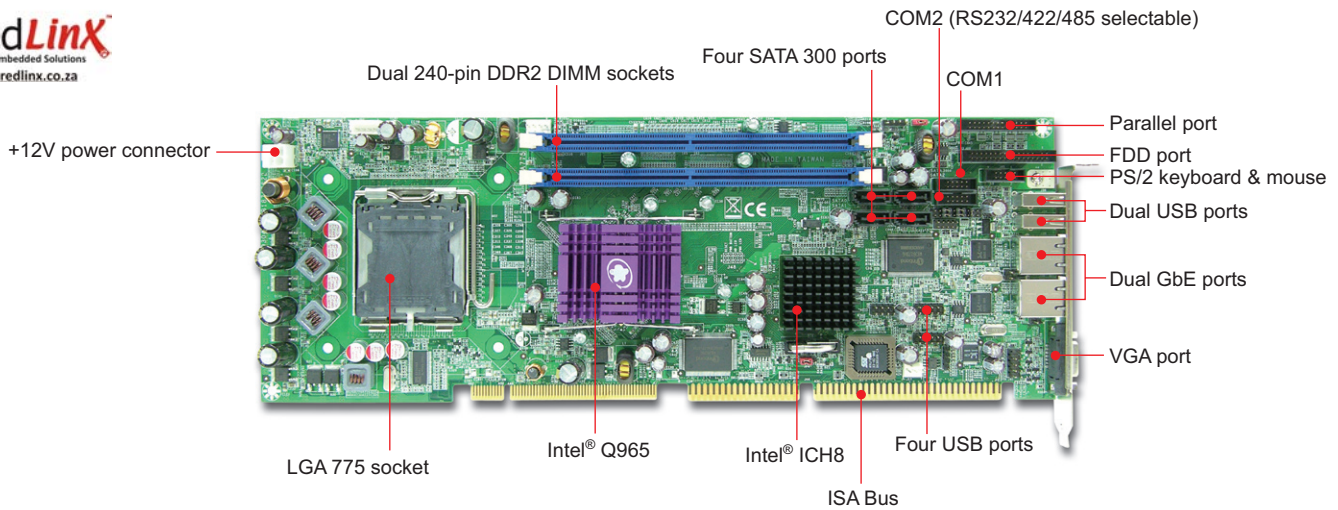

FEATURES

- Support Intel® Core™ 2 Duo processor that generates a maximum 65W TDP. Lower TDP than socket 478 Pentium® 4 processor makes the vertical mount slot board more reliable
- Low profile processor cooler improves stability and reliability of whole system
- More features, such as EM64T, EIST, XD & VT, can be easily applied to system by changing processor
- Integrated Intel® GMA 3000 graphics engine built with high grade display capability
- Lockable cable-latched notches of SATA connector secure connection in vibration condition
- Support ISA expansion

ORDERING GUIDE

Standard	ROBO-8777VG2A LGA-775 Core 2 Duo processor based PICMG 1.0 SBC with DDR2 SDRAM, VGA, Dual Gigabit Ethernet, Audio and USB
Optional	PA-M1AU Multimedia kit with audio and USB ports PS/2 Keyboard/Mouse Cable with Bracket PS/2 keyboard/mouse connectors on bracket Low Profile LGA775 Cooler High efficiency slim cooler increases reliability of system

GENERAL

Processor	CPU & Package: Intel® Core™ 2 Duo, Pentium® D, Pentium® 4, Celeron® D processor in the LGA-775 package FSB: 1066/800/533MHz
Chipset/Core Logic	Intel® Q965 and ICH8
System Memory	Up to 4GB DDR2 800/667/533 SDRAM on dual 240-pin DIMM socket
BIOS	Award BIOS
Storage Devices	EIDE: N/A SATA: Support four SATA 300 drives
Solid State Disk	N/A
Watchdog Timer	Programmable via software from 0.5 sec. to 254.5 sec.
Expansion Interface	N/A
Hardware Monitoring	System monitor (fan, temperature, voltage)
Power Requirement	Typical: +5V@5.6A; +12V@1.3A
Dimension	Dimension : 338.5(L) x 122(W) mm; 13.33"(L) x 4.8" (W) PCB: 6-layer
Environment	Operating Temperature: 0 to 60°C Storage Temperature: -20 to 80°C Relative Humidity: 5% to 90%, non-condensing
MTBF	93,788 hrs

I/O

MIO	Two serial (RS-232x1, selectable RS232/422/485x1), one parallel and one FDD channel
IrDA	N/A
Ethernet	- Dual 10BASE-T/100BASE-TX/1000BASE-T Ethernet - PCI Express x1 interface based Gigabit Ethernet - Dual RJ-45 connectors with two LED indicators
Audio	HDA interface, 2-channel Audio (Realtek ALC 262)
USB	Six USB 2.0 ports
Keyboard & Mouse	Two USB 2.0 ports on bracket dedicated to keyboard & mouse

DISPLAY

Graphic Controller	- GMCH integrated Intel Graphics Media Accelerator 3000 (Intel® GMA 3000) - Provides improved 3D multimedia capabilities including DirectX 9, Shader Model 3.0, OpenGL 1.5, Advanced De-interlacing, MPEG-2 hardware acceleration
Graphic Memory	Intel® Dynamic Video Memory Technology (DVMT) 4.0 system memory sharing up to 256MB
Display Interface	Support CRT interface up to QXGA 75Hz (2048 x 1536)