
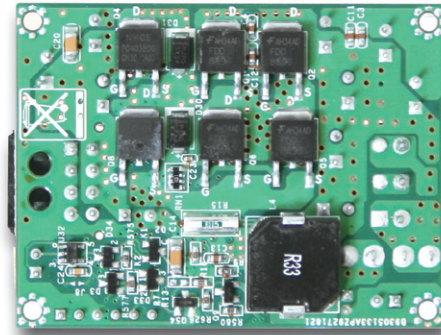


# GADIWA-R9271

DC/DC 9V~27V/wide-input, 12V/  
output Regulator, Board Type

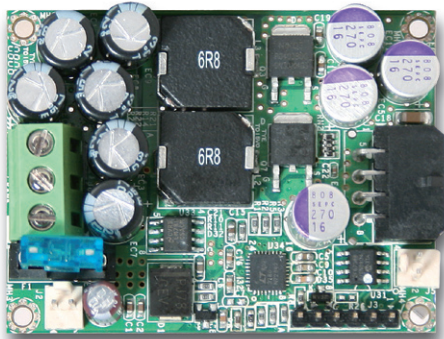

## FEATURES

- 9~27V/Wide-input, 12V/output Regulator with ATX connector with board output
- Compact and user-friendly design for installation and maintenance
- Small size for 1U or higher system to save space
- Suitable for Car PC, Steamer, Truck, Boat and Adapter
- Special Design for Delay-Time

## SPECIFICATION

Input Voltage	9V~27V
Line Regulation	9V~27V continuous, 7~30V<10 sec@cold start
Max Output	160Watts, (12V +5%/-0%, 12.3V nominal)
Efficiency	>95% @ 14V input
Input Connector	Mini-Fit 3 pin (P/N: B6902060)
Output Connector	Mini-Fit 8 pin (P/N: B6902042)
Dimension (WxDxH)	60 x 45 x 15 mm

## CHARACTERISTICS

Output Voltage	Load Regulation	Cross Regulation
+12V	12.3V @ 0~8.5A	12.3V @ 0~8.5A

## ORDERING GUIDE

- GADIWA-R9271  
DC/DC 9V to 27V/Wide-input, 12V/output Regulator, Board Type



## Installation Image

