

AREMO-8164

8-slot full-size industrial node chassis
(Shoe-box)



FEATURES

- Two 5.25" and two internal 3.5" HDD drive bays for CD-ROM or mobile rack, easy to install software and mirror disk (RAID1)
- Two USB ports on the front panel
- Can be vertically or horizontally mounted, easy to fit into space limited environment
- One 12cm ball-bearing cooling fan for better ventilation
- One replaceable air filter for easy cleaning
- Two adjustable positions for hold-down card retainers provide better protection from vibration
- Wall-mounting bracket equipped
- Both 8-slot ISA and PICMG 1.0 or 1.3 backplane applicable; easy to change different backplanes
- Field replaceable power supply bracket for both normal PS/2 and PS/2 redundant power supply, easy for changing defected power supply

ORDERING GUIDE

- **AREMO-8164**
8-slot full-size industrial node chassis
- **AREMO-8164-08P4-00**
8-slot full-size industrial node chassis with 8-slot (4xPCI) PICMG backplane
- **AREMO-8164-08P4-D3501P**
8-slot full-size industrial node chassis with 8-slot (4xPCI) PICMG backplane and 350W active PFC ATX power supply

GENERAL

Construction	Heavy-duty steel
Drive Bay	External: 5.25" x2 Internal: 3.5" HDD x2
Card Retainer	Two locations for one card retainer
Air Filter	One replaceable air filter at the front door
Cooling Fan	One 12cm ball-bearing fan
Indicator	Power on/off x1, HDD x1
Switch	Power on/off x1, System reset x1
Speaker	One 8 Ω speaker
Connector	2 USB ports on the front panel
Standard Color	Silver, Black
Dimension	330(W) x 420.8(D) x 172(H) mm; 12.99"(W) x 16.56"(D) x 6.77"(H)
Weight	Net: 10 kg (22.1 lb); Gross: 9.5 kg (20.9 lb)
Backplane	PBP-08I: 8-slot ISA backplane PBP-08P4: 8-slot (4xPCI) PICMG backplane PBP-08P3: 8-slot (3xPCI) PICMG backplane

POWER SUPPLY

ORION-D3501P optional

Input Voltage	90V ~ 264V AC, full range
Input Frequency	47 ~ 63 Hz
Input Current	6A@90V
Efficiency	> 68%
Holdup Time	17 ms. at full load @25°C
Over Voltage Protection	+5V@ 7V; +3.3V@ 4.3V; +12V@ 15.6V
Over Power/Load Protection	Output power over 110%~140%
MTBF	75,145 hrs
EMI & Safety Approval	UL, TUV
Temperature/Humidity	Operating: 0 ~ 50°C, 20 ~ 85%RH Storage: -40 ~ 70°C, 10 ~ 90%RH
Dimension (WxDxH)	150x140x86 mm; 5.9"x5.5"x3.4"

ENVIRONMENT

Operating Temperature Range	0 to +55°C
Storage Temperature Range	-20 to +80°C
Relative Humidity	5% to 95%, non-condensing
Vibration	5~7 Hz: 0.5" double amplitude displacement 7~2000 Hz: 1.5g acceleration

AREMO-8164

8-slot full-size industrial node chassis
(Shoe-box)

FEATURE	BENEFITS
<ul style="list-style-type: none"> 5.25" drive bays for CD-ROM or mobile rack 	<ul style="list-style-type: none"> Easy to install software and mirror disk (RAID 1)
<ul style="list-style-type: none"> Two USB ports on the front panel 	<ul style="list-style-type: none"> Easy to operate the system
<ul style="list-style-type: none"> One replaceable air filter 	<ul style="list-style-type: none"> Easy cleaning
<ul style="list-style-type: none"> Can be vertically or horizontally mounted 	<ul style="list-style-type: none"> Easy to fit into different space limited environments
<ul style="list-style-type: none"> Two adjustable positions for hold-down card retainer 	<ul style="list-style-type: none"> For fixing all the cards more flexibly and tightly
<ul style="list-style-type: none"> Both 8-slot ISA and PICMG backplane applicable 	<ul style="list-style-type: none"> Easy to change to different backplane and keep in stock
<ul style="list-style-type: none"> Field replaceable power supply bracket for both normal PS/2 power supply and PS/2 type redundant power supply 	<ul style="list-style-type: none"> Easy maintenance


WHAT'S NEW



Two Adjustable Card Retainer Positions
For fixing all the cards more flexibly and tightly



Plastic Fan Filter
For easy cleaning and replacing

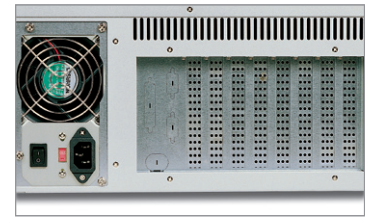

Excellent Cooling System
New slot cover for better ventilation

ENGINEERING DRAWING

